

# TELTONIKA DUALCAM

ADVANCED TRACKER WITH DUAL CAMERA



Learn more



DRIVER NOTIFICATIONS  
ON EVENTS



EVENTS TRANSFER  
TO THE SERVER



VISUAL  
MONITORING

## VIDEO SENDING TRIGGER

By Crash scenario, DIN1/DIN2  
(panic button, seat belts and  
etc.)

## VIDEO/PHOTO BY REQUEST

Available from both cameras with  
SMS/GPRS command

## PERIODIC PHOTO SENDING


Automatically every configured  
period

## POWER CONTROL VIA DOUT

and Relay

Teltonika DualCam solution is perfect for capturing videos or pictures of the events that might occur on the road, e.g. crash. Mounted on the vehicle front window, two cameras are used, front and rear, to record videos before and after the events, take photos periodically or by request and send all data to the server. Besides, the innovative solution ensures the safety of passengers as recordings are made of what is happening inside the vehicle.

You can also get the videos or pictures on all scenarios, such as green driving, idling detection, unplug detection, towing detection, or geofence, by sending a request from server. Connected over RS232, trackers FMC125 or FMC650 of with dual camera support High Efficiency Video Coding (H265) for a fast video file delivery. For an easy implementation with server, we prepared a universal communication protocol.

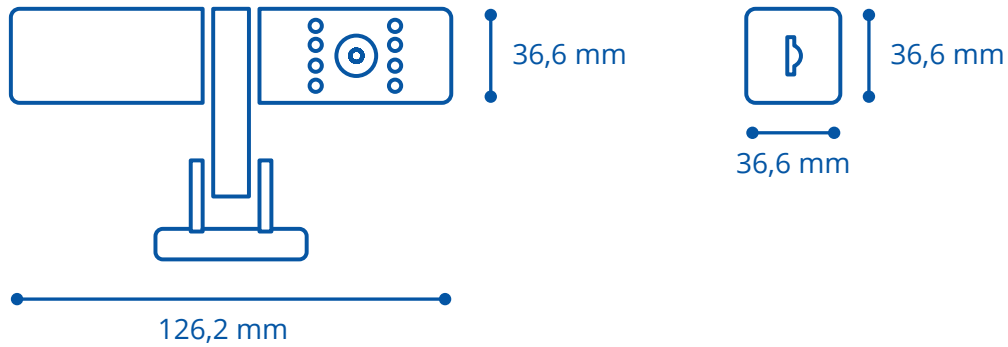

**Technical Data**

Supported by	FMC125, FMB125, FMx225, FMC650
Day & Night Vision Effect	Day (Color), Night (Black & White)
Angle of View	Horizontal 120°, Vertical 70°
Dual Camera	Front and Rear (equal characteristics)
Camera casing dimensions	126.2 x 36.6 x 36.6 mm
Camera mounting	Sticky tape (3M) or screws
Certificates	CE, FCC, RoHS

**Electrical parameters**

Input voltage range	Max. 8.4 W (12 V/24 V)
Working temperature and humidity	30C~85C Humidity<90%
Stand-by electric current	220mA

**Function parameter**

Real time clock (RTC) synchronization	Available over FM (via NTP, NITZ or GNSS)
Picture resolution	1280x720 (default) (50KB transfer period 18 sec), Configurable: 160x120; 320x240; 640x480; 1920x1080
IR Distance	2 Meters
Cable length	RS232 (3.5 m)
Video compression	H.265
Video resolution	720P (20 sec. – 6MB, transfer period ~320sec.)
Video storage	2psc. MicroSD card (Max 64G up to 40 hours of video)